

HIP TRUSTER

SAFETY PRECAUTION


Safety First

Regardless of how enthusiastic you may be about getting on your equipment and exercising, take the time to ensure that your safety is not jeopardized. A moment's lack of attention can result in an accident, as can failure to observe certain simple safety precautions.

- a. Assemble the equipment according to the assembly instructions and only use the individual parts enclosed for assembly of the equipment and which are listed in the parts list as being specifically for this equipment. Before you start assembly, check against the delivery to make sure that everything has been delivered and check against the packing list to make sure all parts have been enclose.
- b. Read, study and understand the Owner's Manual and all the warning labels on this product. Furthermore, it is recommended to familiarize yourself and others with the proper operation and workout recommendations for this product prior to use. Some of this information can be obtained in this owner's Manual, as-well-as from your local retailer.
- c. It is imperative that you retain this Owner's Manual and be sure all warning labels are legible and intact. Replacements Owner's Manual and labels are available from your local retailer.
- d. It is recommended that another person assist you with the assembly this unit.
- e. Consult with your physician before beginning any exercise program. It is recommended that you undergo a complete physical examination.
- f. Use proper discretion when children are present.
- g. Frayed or worn cables can be dangerous and may cause injury. Periodically check these cables for any indication of wear.
- h. Keep hands, limbs, loose clothing and long hair well out of the way of moving parts.
- i. Do not attempt to lift more weight than you can control safely.
- j. Work within you recommended exercise level. DO NOT work to exhaustion. If you feel any pain or discomfort, stop your workout immediately.
- k. Inspect the machine for any sign of wear on parts, hardware becoming loose or cracks on welds. If a problem is found do not use or allow the machine to be used until the defective part is repaired or replaced.
- 1. DO NOT place any sharp objects around the machine.

Exploded View



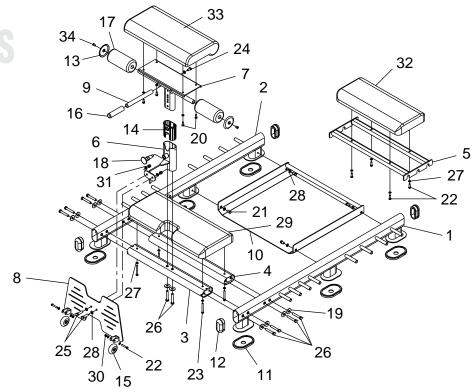


| Number | Description | Quantity |
|--------|-----------------|----------|
| 1 | Left Beam | 1 |
| 2 | Right Beam | 1 |
| 3 | Front Beam | 1 |
| 4 | Cross Beam | 1 |
| 5 | Cushion Support | 1 |
| 6 | Adjustable Tube | 1 |
| 7 | Support | 1 |
| 8 | Pedal | 1 |
| 9 | Handle | 1 |
| 10 | Main Beam | 1 |
| 11 | Ellipse Pad | 6 |
| 12 | Ellipse Plug | 4 |
| 13 | Round Plug | 2 |
| 14 | Hollow Sleeve | 1 |
| 15 | Wheel | 2 |
| 16 | Handle Bar | 1 |
| 17 | Foam With Cover | 2 |

| Number | Description | Quantity |
|--------|-------------------|----------|
| 18 | Fast Pin | 1 |
| 19 | Big Washer 12 | 10 |
| 20 | Bolt M8*25 | 4 |
| 21 | Allen Bolt M10*20 | 4 |
| 22 | Bolt M8*45 | 6 |
| 23 | Bolt M8*70 | 4 |
| 24 | Bolt M10*20 | 1 |
| 25 | Bolt M10*25 | 2 |
| 26 | Bolt M12*70 | 10 |
| 27 | Washer 8 | 16 |
| 28 | Washer 10 | 9 |
| 29 | Cushion A | 1 |
| 30 | Lock Nut M8 | 2 |
| 31 | Lock Nut M10 | 2 |
| 32 | Cushion B | 1 |
| 33 | Cushion C | 1 |
| 34 | Screw M8*25 | 2 |
| | | |




STEP 01

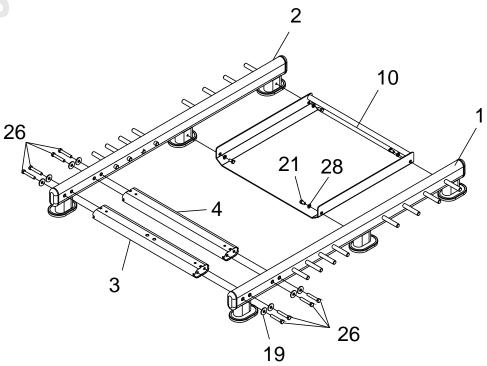


- 1. Attach Front Beam (3) and Cross Beam (4) to Left Beam (1) and Right Beam (2) with eight Bolts M12*70 (26) and eight Big Washers 12 (19).
- 2. Attach Main Beam (10) to Left Beam (1) and Right Beam (2) with four Allen Bolts M10*20 (21) and four Washers 10 (28).



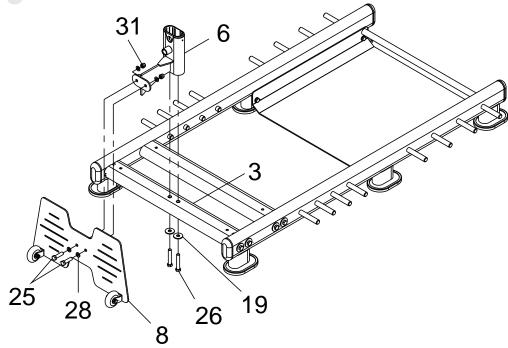


- 1. Attach Adjustable Tube (6) to Front Beam (3) with two Bolts M12*70 (26) and two Big Washers 12 (19).
- 2. Attach Pedal (8) to Adjustable Tube (6) with two Bolts M10*25 (25), four Washers 10 (28) and two Lock Nuts M10 (31).


STEP 03

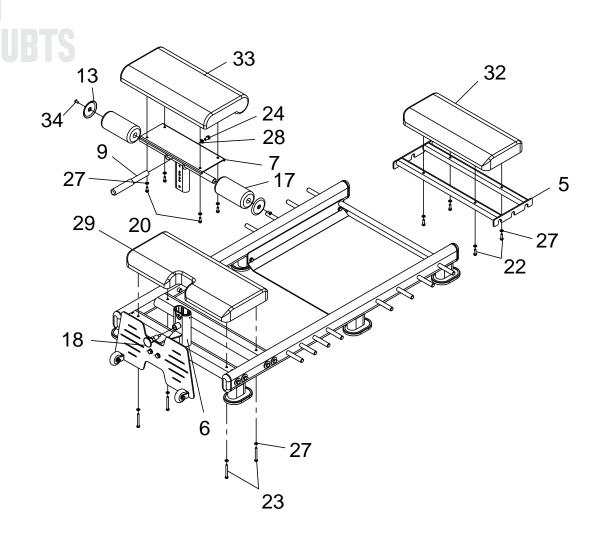


- 1. Attach Cushion A (29) to Front Beam (3) and Cross Beam (4) with four Bolts M8*70 (23) and four Washers 8 (27).
- 2. Attach Handle (9) to Support (7) with Bolt M10*20 (24) and Washer 10 (28).
- 3. Insert two Foam with Covers (17) into Support (7) with two Round Plugs (13) and Screw M8*25(34).
- 4. Attach Cushion C (33) to Support (7) with four Bolts M8*25 (20) and four Washers 8 (27).
- 5. Attach Support (7) to Adjustable Tube (6) with Fast Pin (18).
- 6. Attach Cushion B (32) to Cushion Support (5) with four Bolts M8*45 (22)


NO Doubts

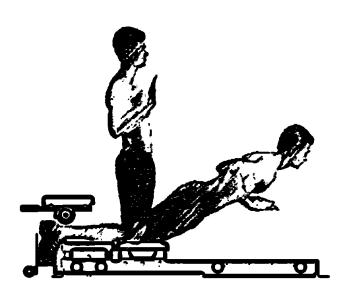

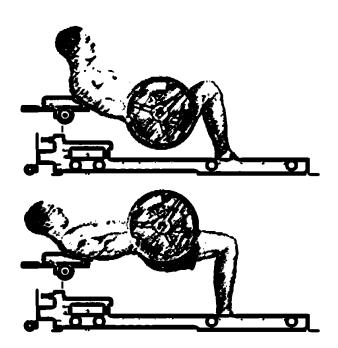

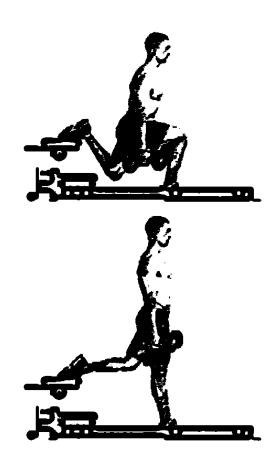

www.zunfit.com

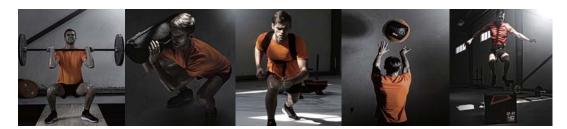



ITALY OFFICE

Zun Srl via Mammarella snc 66100 Chieti Scalo (CH),Italy Email: info@zunfit.com Phone: +39 0871 551762

CHINA OFFICE

Zunone 83# South Tongfu Road, Nantong Jiangsu China Email: simon@zunone.cn Phone: +0086-13901602295